


Double X keyboard stands user manual


First Step

Put the spring into the positioning bolt, through $\varnothing 10\text{MM}$ round hole to the $\varnothing 6\text{MM}$ round hole out, and then fixed with the moon nut.

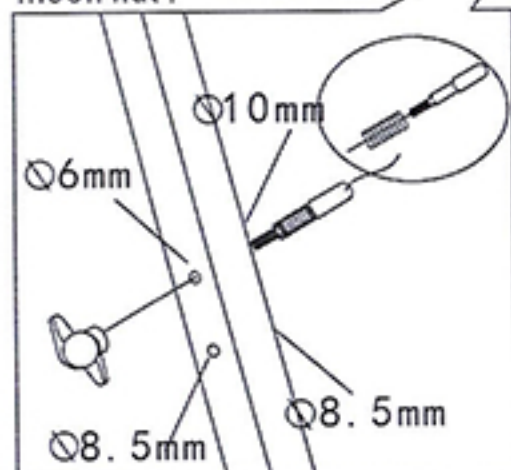


Please don't drop the spring into pipes, if yes, please take it out by tweezer.


Second step

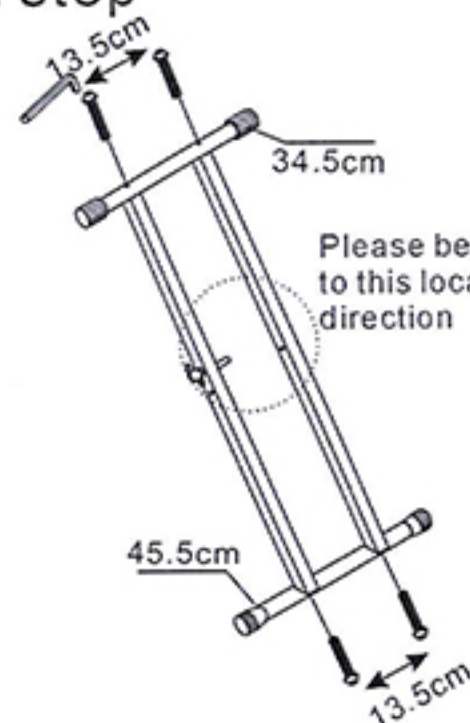


Third step

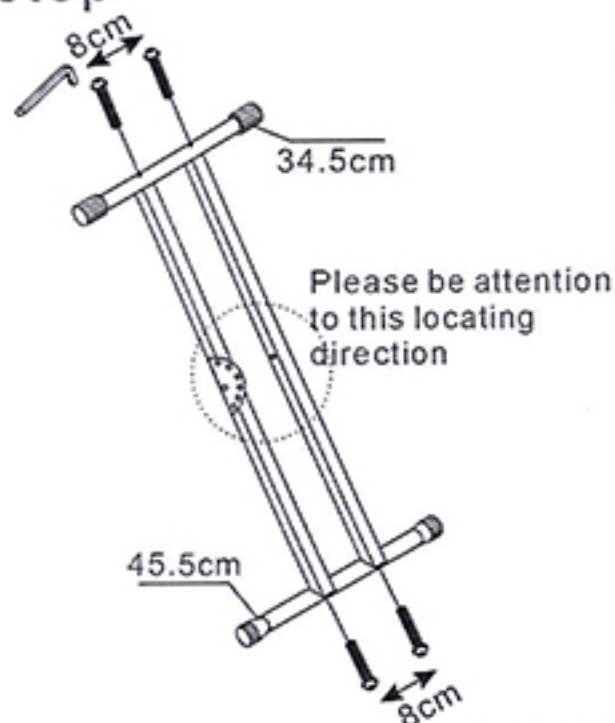

Forth Step

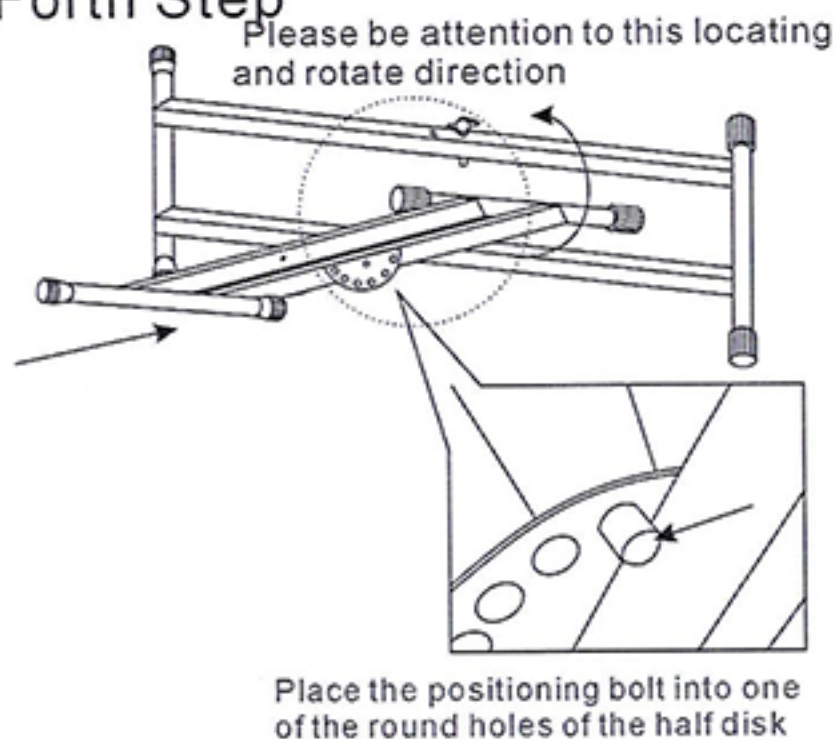

Fifth Step

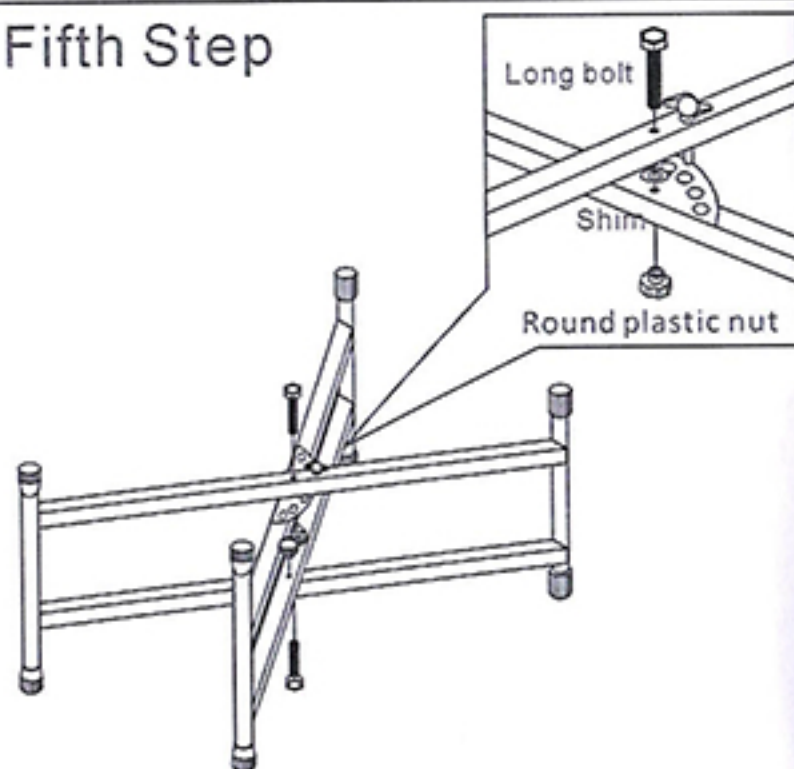

Last Step

