

Ceiling Speaker Installation




Item ref: 952.260UK, 952.261UK, 952.262UK

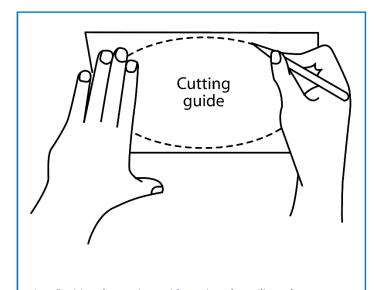


 Position the cutting guide against the ceiling where you intend to install the speaker and trace around it.




Cut out the trced area using a pad saw or other suitable tool.

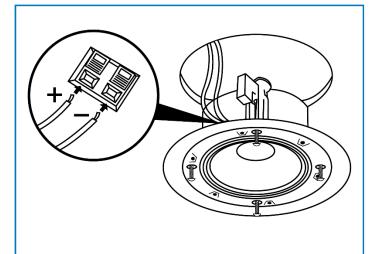


 Take the speaker unit out of the packaging and remove the grille. Connect the speaker wires to the appropriate "+" and "-" connections (select the desired tappings for 100V units).



4. Turn the mounting screws in part way to help cut the threads. Install the speaker unit into the cut-out, ensuring that the 4 dog-ear mounts are turned inwards.

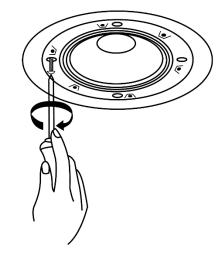

Once in place, turn the 4 fixing screws clockwise. This will
cause the dog-ear clamps to rotate outwards and tighten
to hold the unit in place.



5. Place the speaker grille back onto the speaker, it will fix magnetically.